

APA Series Adaptive Processing Amplifiers



PROCESSING POWER

The **APA Series** from XTA

APA-4E8 & APA-4E6

 Dante™

www.xta.co.uk



APA Series Adaptive Processing Amplifiers

Processing Power. Like never before.

APA delivers a level of performance that ensures your audio connects with your audience. Adaptive processing reacts to prevailing conditions and keeps your system sounding as good as possible for as long as possible.


You have full control over a powerful suite of filtering and protection, including multiple bands of XTA legendary dynamic EQ, FIR filtering and phase linearisation, soft knee compression, ultra-transparent program and peak limiting, and all the classic crossover and EQ components traditionally used to set up your system.

Two full mix matrices allow you to source audio either locally from AES, analogue inputs, or via a networked audio connection* and, independently, to break-in audio and route directly (or through DSP resources) onto the network*.

Power delivery into all loads is sustained for longer and at higher levels thanks to our massive power supply and low-loss output stages, meaning reduced heat production and higher efficiency. Real world power output – all night long performance, not just all note long!

Search "XTA APA" to find out more...

*network audio inputs are factory option

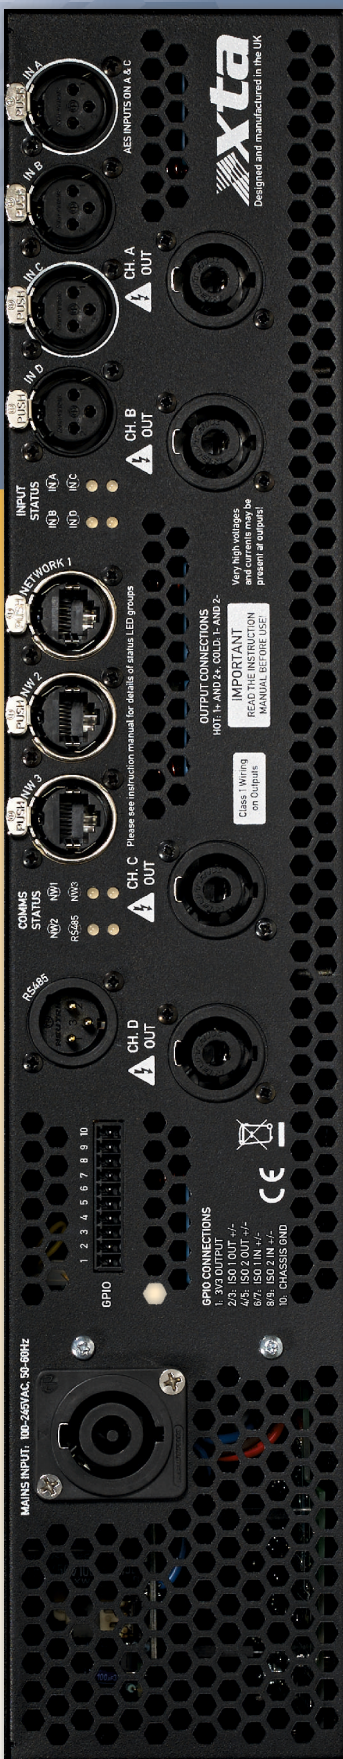

Features and Specifications

Features

Four channels of amplification, processing and real time monitoring at 96k.

Continuous monitoring of mains supply voltage and current, with user adjustment of maximum current draw.

Full suite of XTA processing including dynamic EQ and FIR filtering. User memory recall via front panel permits single channel, routing "overlays", or complete unit configurations.

Source matrix and mix selection allows unassigned internal DSP resources to process external signals.

Full colour LCD with user selectable metrics for reassuring monitoring of performance.

Multi-functional metering display with tri-colour modes for I/O signal monitors, gain reduction, and power output.

PFC regulated switching supply design with "quick wake-up" and "ultra low power" modes (<1.0W).

Class D amplifier design with 80% system efficiency ensuring greater power delivery from mains inlet to speaker outlets.

Flash memory for playback of emergency evac messages and data logging of all major events.

Programmable wake-up event management: Signal present, remote command, GPI input signal.

Configurable isolated GPIO ports.

New remote software, mac and PC compatible with integrated Ethernet support, with advanced grouping architecture.

Technical Specifications

Inputs:

Dante Network Audio x 4, AES3 x 2 (four chs.), Analogue x 4. Full Mix matrix for power amp processing and network outputs.

Outputs: APA-4E8 [APA4E6]

Dante Network Audio x 4 - full mix matrix independent of power amp processing.

Power amplifier outputs:

Total available output power: 20000W

Peak useable output voltage/ch.: 180V

Peak useable output current/ch.: 72A [44A]

Maximum continuous power/ch.:

4 x 5000W [3000W] @ 2 ohms

4 x 5000W [3000W] @ 2.7 ohms

4 x 3300W [2000W] @ 4 ohms

4 x 1700W [1000W] @ 8 ohms

Maximum continuous power/bridged pair:

2 x 7400W [4400W] @ 4 ohms

2 x 6600W [4000W] @ 8 ohms

2 x 3400W [2000W] @ 16 ohms

THD: better than 0.05% (2kW, 1k)

Freq. resp.: 3Hz-30kHz -3dB

Processing:

ADC and DAC resolution: 24bit

Internal sample rate: 96kHz

Processing precision: 32bit (floating point)

Delay; Polarity; IIR EQ (PEQ, shelving, variQ, all pass, phase, notch, band pass);

Crossover up to 48dB/Oct.; FIR filtering;

Dynamic EQ; Compressor; Program & Peak

Limiter

System:

Mains voltage: 115-230VAC nominal 50-60Hz

Mains current: 32A maximum (PFC)

Suggested circuit breaker: C32

(with user adjustable current limit)

Mains connector: 32A "powerCon"

Dims: 88 x 482 x 498mm (HxWxD)

Weight: 15.0kg

Copyright XTA Electronics Ltd. 2017

XTA Electronics Ltd., The Design House, Vale Business Park, Worcester Road, Stourport-on-Severn, Worcestershire, DY13 9BZ. Registered in England: 2735913
Due to continuing product improvement, all specifications subject to change.

